

Overview:

This addressable unit is designed to drive a speaker for an announcement/play music etc. The unique ID allows the user to select a particular speaker or a group of speakers or all speakers to ON/OFF and volume control according to the need.

Specification

Electrical Specifications


Operating voltage	17-27V DC
Quiescent current	5mA
Alarm Tone current	400mA(max)
Alarm Voice current	300mA(max)
Sound level	90 dB at 10 feet
Speaker With Driver Capacity	12W
Altitude	3000m(above MSL)

General Specifications

Operating temperature	-10°C to 55°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Color	White
Compatibility	ALPA2XV1 Protocol

Complied with:

MIL-461E
 Tested & Certified by **NABL - INDIA**

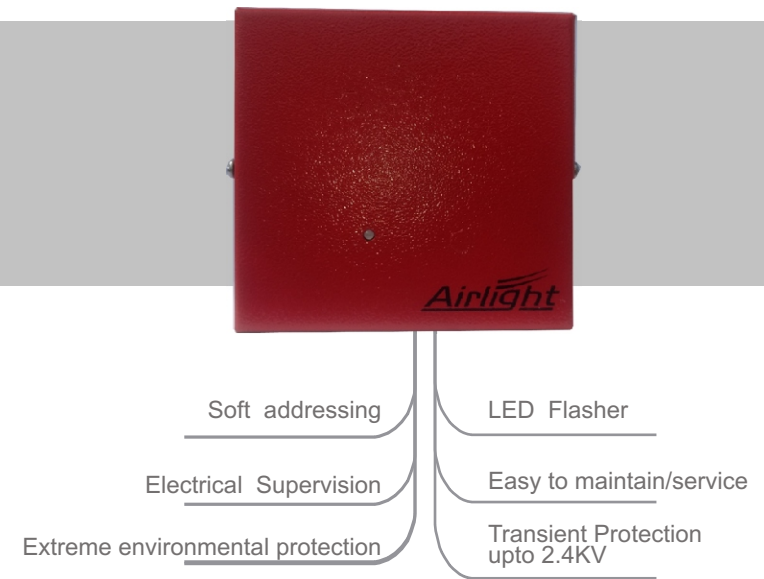

Mechanical Specifications

Dimensions(HxWxD) 106x108X38mm

Weight

Without Backbox 144g With Backbox 372g

