

Conventional Optical Smoke Detector

Model No - AC103SD



- Wide operating voltage
- Low standby current
- Drift compensation technique for false alarm immunity
- Insect-resistant screening
- Easy to maintain/service
- Dual bi-color LED indication for 360° viewing angle

Overview:

This Conventional Smoke Detector houses smoke sensor for monitoring the level of smoke in its surveillance. It switch to alarm state, when the level of smoke reaches its pre-set level.

Specification

Electrical Specifications

Operating voltage Nominal 12/24V DC
Minimum 9V DC
Maximum 26V DC

Quiescent current 50μ A

Alarm current 25 mA at 24V
12 mA at 12V

Indications

Normal Green LED
(Blinks every 8 sec)

Alarm Red LED
(Glows Steady)

General Specifications

Smoke sensitivity 1+/- 0.5 %obs/ft

Operating temperature 0°C to 49°C

Storage temperature 5°C to 40°C

Humidity 0-95% RH (Non-condensing)

Color White


Housing Polycarbonate

Cycle Time 4 sec

Contact Clamp Stainless steel

Mechanical Specifications

Dimensions(DiaxH)		Weight	
Without Base	100x34mm	Without Base	63g
With Base	100x46mm	With Base	103g

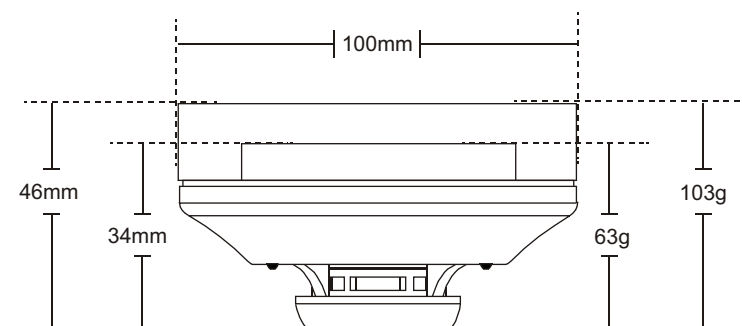

Conventional Heat Detector

Model No - AC103HD



Overview:

This Conventional Heat Detector houses thermal sensor for monitoring the level of heat in its surveillance. It switch to alarm state, when the level of heat reaches its pre-set level.

Wide operating voltage

Easy to maintain/service

Low standby current

Dual bi-color LED indication for 360°viewing angle

Specification

Electrical Specifications

Operating voltage Nominal 12/24V DC
Minimum 9V DC
Maximum 26V DC

Quiescent current 2.3μA

Alarm current 25 mA at 24V
12 mA at 12V

Indications

Normal Green LED
(Blinks every 8 sec)

Alarm Red LED
(Glows steady)

General Specifications

Thermal sensitivity 57°C

Operating temperature 0°C to 49°C

Storage temperature 5°C to 40°C

Rate Of Raise Of Temp 11.1°C/min(20°F/min)

Humidity 0-95% RH (Non-condensing)

Color White

Housing Polycarbonate

Cycle Time 4 sec

Contact Clamp Stainless steel

Mechanical Specifications

Dimensions(DiaxH)


Without Base 100x30mm

With Base 100x42mm

Weight

Without Base 58g

With Base 98g

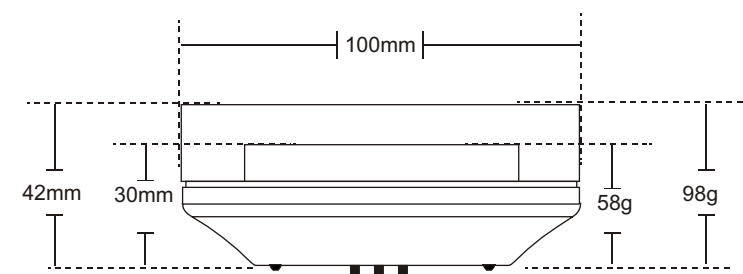


Conventional Multisensor

Model No - AC103MD

Overview:

This Conventional Multisensor houses smoke and thermal sensors for monitoring the level of smoke & heat in its surveillance. It switch to alarm state, when the level of heat/smoke reaches its pre-set level.

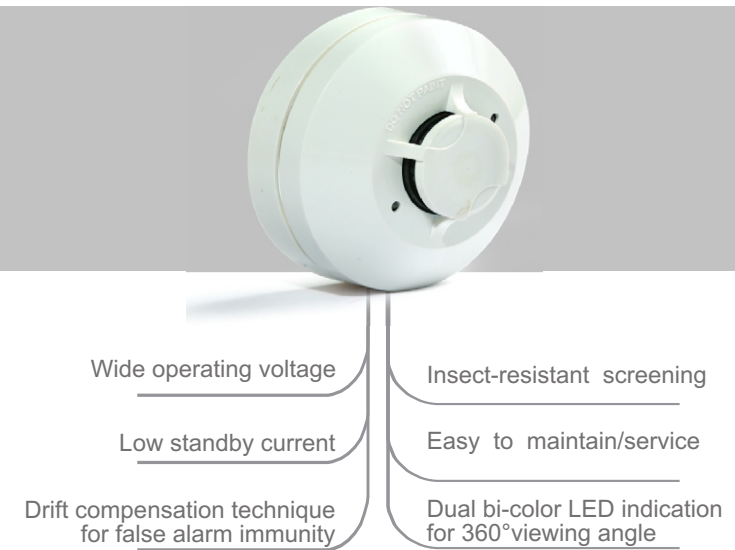

Specification

Electrical Specifications

Operating voltage Nominal 12/24V DC
Minimum 9V DC
Maximum 26V DC

Quiescent current 50μ A

Alarm current 25 mA at 24 V
12 mA at 12 V

Indications

Normal Green LED
(Blinks every 8 sec)

Alarm Red LED
(Glows steady)

General Specifications

Smoke sensitivity 1+/- 0.5%obs/ft

Thermal sensitivity 57°C

Operating temperature 0°C to 49°C

Storage temperature 5°C to 40°C

Humidity 0-95% RH (Non-condensing)

Color White


Housing Polycarbonate

Cycle Time 4 sec

Contact Clamp Stainless steel


Mechanical Specifications

Dimensions(DiaxH)	Weight
Without Base 100x34mm	Without Base 70g
With Base 100x46mm	With Base 110g

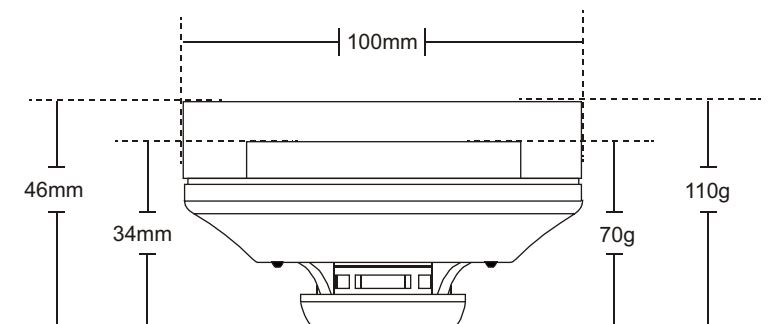

Conventional Optical Duct Smoke Detector

Model No - AC103DSD

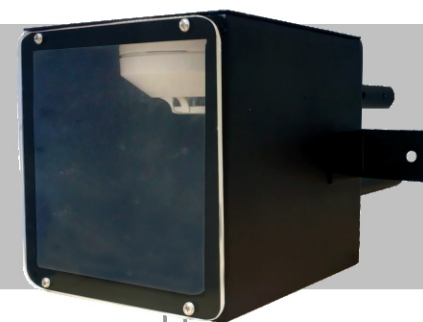

- Wide operating voltage
- Low standby current
- Drift compensation technique for false alarm immunity
- Insect-resistant screening
- Easy to maintain/service
- Dual bi-color LED indication for 360° viewing angle

Overview:

This Conventional Duct Smoke Detector houses smoke sensor for monitoring the level of smoke in its surveillance. It switch to alarm state, when the level of smoke in the airstream of duct work sections of the HVAC air handling system.

Specification

Electrical Specifications

Operating voltage Nominal 12/24V DC
Minimum 9V DC
Maximum 26V DC

Quiescent current 50μ A

Alarm current 25 mA at 24V
12 mA at 12V

Indications

Normal Green LED
(Blinks every 8 sec)

Alarm Red LED
(Glows Steady)

General Specifications

Smoke sensitivity 1+/- 0.5 %obs/ft

Operating temperature 0°C to 49°C

Storage temperature 5°C to 40°C

Humidity 0-95% RH (Non-condensing)

Color White

Cycle Time 4 sec

Contact Clamp Stainless steel

Detector Contact Clamp Stainless steel

Housing Material 16 Gauge Cold Rolled sheet

Detector Housing Polycarbonate

Back Box Black Matte

Front Cover Acrylic sheet

Mechanical Specifications


Dimensions(LxBxD) 155x150x150mm

Sampling Tube 205mm

Exhausted Tube 220mm

Weight

Without Base 1710g **With Base** 1820g

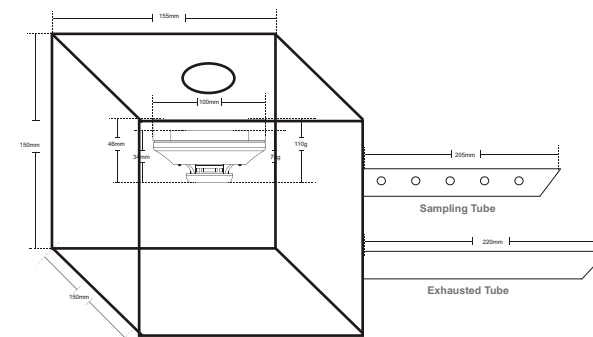

Analogue Linear Heat Sensing Cable

Model No - AA LHSC 700-001



Overview:

The analogue linear heat sensing cable (LHSC) is designed to provide early detection of fire and overheating in circumstances. LHSC Analogue is a coaxial cable constructed with a copper coated steel central conductor, an inner insulation (dielectric), a tinned copper braid layer and an overall protective sheath. It has a negative temperature coefficient (NTC). Analogue cable is employed in conjunction with an end of line terminating device and a zone monitoring unit or control panel with an appropriate LHSC interface unit.


- Easy to install
- Adjustable alarm set point
- Zones of up to 500m in length
- Mechanical and chemical protection available
- Can detect hot spot
- Recoverable and resettable operation

Specification

Outer Sheath	Red PVC-standard
Outer Diameter	Red PVC-2.8-3.0mm
Minimum operating Temperature	-20°C
Minimum installation Temperature	0°C
Weight 1km on the reel	Red PVC-19kg
Tensile strength	200Newtons

Digital Linear Heat Sensing Cable


Model No - AD LHSC 700-070

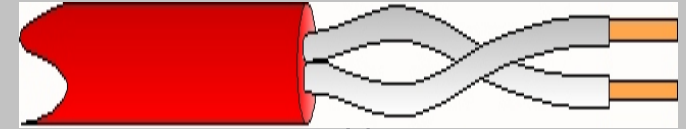

Overview:

This LHSC Digital cable comprises of a twisted pair twin core cable. Each core is of tinned copper coated spring steel and has a special heat reactive polymer insulation. The cable has an overall protective jacket / sheath. It is specially formulated such that it plasticizes at a specific temperature.

LHDC Digital cable may be used as a simple switch to operate a relay etc. However in most installations the minimum requirement is that the LHDC circuit is monitored for disconnections by means of EOL device and an appropriate fire alarm channel or address loop interface unit.

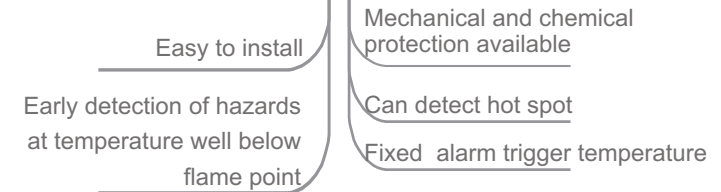

Specification

Number of cores	2	Tensile strength	200Newtons
Outer Sheath	Black Nylon-Chemical protection	Alarm Temperature	70°C
Outer Diameter		Maximum Ambient Temperature	45°C
Nylon	4.0mm +/- 0.3mm		
Nylon & stainless steel armour	4.0mm +/- 0.3mm		
Minimum operating Temperature	-40°C		
Minimum installation Temperature	-10°C		
Weight 1km on the reel-standard	21kg		
Weight 500m on the reel-armoured cable	34kg		

Conventional Manual Call Point

Model No - AC104CP



Overview:

This Conventional Manual call point is designed for instant manual activation of fire notification system. This unit designed for indoors, employ a flip cover to minimize false intervention. No need of the manual reset , it goes with the elite interior.

- Low standby current
- Wide operating voltage
- Flip cover to minimize false intervention
- Easy to install and elegant design
- No manual reset is required at MCP

Specification

Electrical Specifications

Operating voltage Nominal 12/24V DC
Minimum 9V DC
Maximum 26V DC

Quiescent current 1μ A

Alarm current 25 mA at 24V
12 mA at 12V

Indications

Alarm Red LED
(Glows Steady)

General Specifications

Operating temperature 0°C to 49°C

Storage temperature 5°C to 40°C

Humidity 0-95% RH (Non-condensing)

Color Red

Housing ABS


Mechanical Specifications

Dimensions(HXWXD) 120x120x48mm

Weight

Without Backbox 108g

With Backbox 378g

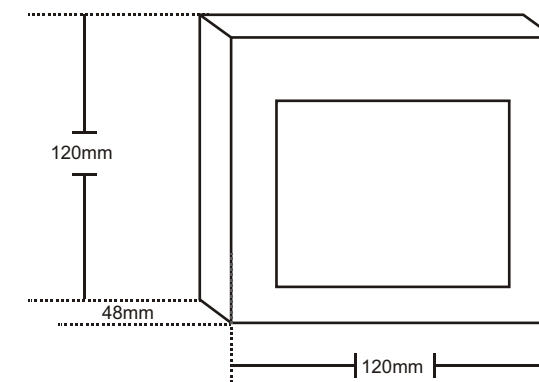


Conventional Weather Proof Manual Call Point

Model No - AC103WCP



Overview:

This Conventional Weather Proof Manual Call Point is designed for instant manual actuation of fire notification system. It triggers manual fire signal, by breaking the glass. Weather Proof Manual Call Point is designed to withstand outdoor and this device is provided with Hammer and Chain.

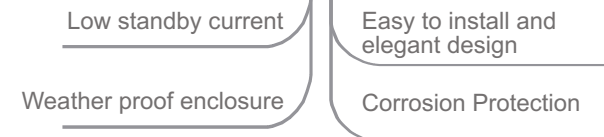

Specification

Electrical Specifications

Operating voltage	Nominal	12/24V DC
	Minimum	9V DC
	Maximum	26V DC

Quiescent current	2μA
--------------------------	-----

Alarm current	25mA at 24V
	12mA at 12V

General Specifications

Type of protection	Weatherproof-Wp
---------------------------	-----------------

Area classification	Safe area
----------------------------	-----------

Apparatus standard	IS-13947/93
---------------------------	-------------

Mechanical Specifications

Dimensions(HxW)	105x105mm
------------------------	-----------

Material	Aluminium Lm6
-----------------	---------------

Weight	1.5kg(Approx.)
---------------	----------------


IP Protection	IP 65
----------------------	-------

Finish	Anti corrosive epoxy powder coated
---------------	------------------------------------

Cable Entry	2 x 3/4" ET
--------------------	-------------

Gasket	Neoprene
---------------	----------

Hardware	Stainless Steel(SS-304)
-----------------	-------------------------

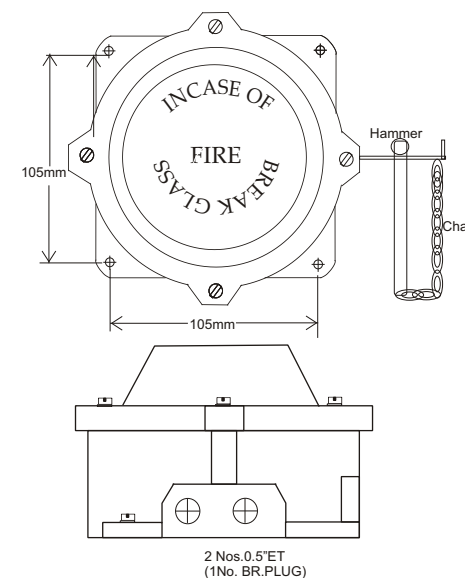


Conventional Flame Proof Manual Call Point

Model No - AC103FCP

Overview:

This Conventional flame Proof Manual Call Point is designed for instant manual actuation of fire notification system. It triggers manual fire signal, by breaking the glass. Flame Proof Manual Call Point is designed to withstand outdoor and this device is provided with Hammer and Chain.

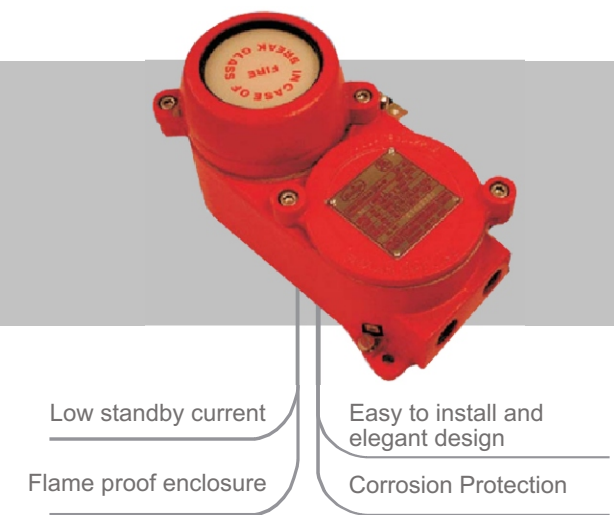

Specification

Electrical Specifications


Operating voltage	Nominal	12/24V DC
	Minimum	9V DC
	Maximum	26V DC
Quiescent current	2μA	
Alarm current	25mA at 24V	
	12mA at 12V	

General Specifications

Type of protection	Flameproof-Exd
Area classification	Safe area
Apparatus standard	IS-2148/81

Mechanical Specifications

Dimensions(HxW)	215x105mm
Material	Aluminium Lm6
Weight	3kg(Approx.)
IP Protection	IP 65
Finish	Anti corrosive epoxy powder coated
Cable Entry	2 x 3/4" ET
Gasket	Neoprene
Hardware	Stainless Steel(SS-304)

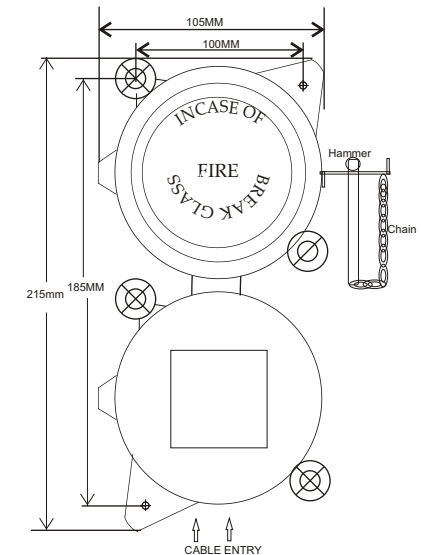

Conventional Sounder Beacon

Model No - AC104SB



High volume evacuation tone

Bright flashing LED

ON/OFF control from panel

Overview:

This device is engineered to raise an alarm at the time of emergency. Bright flashing LED & high volume buzzer tone is featured to draw the attention of the occupants for evacuation. In case of fire alarm from this unit is either triggered automatically from fire detectors, or manually from manual call points

Specification

Electrical Specifications

Operating voltage	24V DC
Alarm Tone current	400mA(max)
Sound level	90 dB at 10 feet

Indications


Alarm Indicator	White LED (Flashes)
------------------------	------------------------

General Specifications

Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Color	Red
Housing	Polycarbonate

Mechanical Specifications

Dimensions(HxWxD)	120x120x45mm
Weight	
Without Backbox	204g
With Backbox	472g

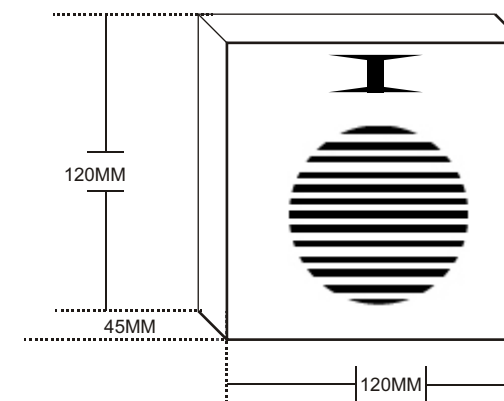


Conventional Fire Alarm Panel-2 Zone

Model No - ALCAP201Z



Overview:

This micro controller based conventional Fire Alarm control panel is easy to install and maintain by the user. It has simple LED indication and touch control switch. This unit is designed for small application and budget friendly. Since it has very less hardware, chances of failures are also very less. This panel can be used with all standard brand conventional devices.

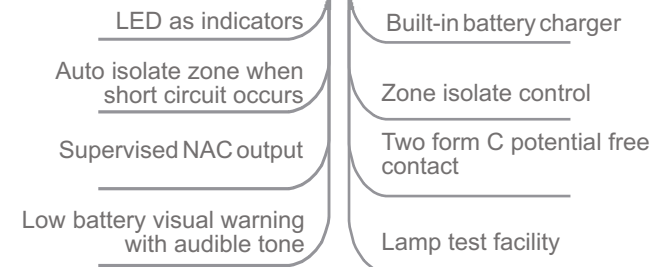

Specification

Electrical Specifications

Primary power supply	220V/110V $\pm 10\%$ AC, 50/60Hz
Secondary power supply	24VDC (2nos of 12V, 1.3/7Ah SLA battery)
Battery charging current	500 mA(max)
Battery Charging Voltage	28 ± 1 V
Operating temperature	0°C to 49°C
Storage temperature	5°C to 50°C
Humidity	0-95% RH (Non-condensing)
Housing	16 guage cold rolled sheet metal powder coated

Initiating Device Circuit(zone circuit)

Normal voltage	24V DC
Alarm current	25mA(max)/Zone
Short circuit peak current	48mA(max)
End of line Resistor	4.7K Ω , 1/2 watt
Detectors per zone	20

Relay Contact Rating

Fire relay	2A@24VDC
Fault relay	2A@24VDC
NAC output	480mA@24VDC

Mechanical Specifications

Dimensions(HXWXD)	342x275x70mm
--------------------------	--------------


Conventional Fire Alarm Panel-4 Zone

Model No - ALCAP401Z



Overview:

.This micro controller based conventional Fire Alarm control panel is easy to install and maintain by the user. It has simple LED indication and touch control switch. This unit is designed for small application and budget friendly. Since it has very less hardware, chances of failures are also very less. This panel can be used with all standard brand conventional devices.

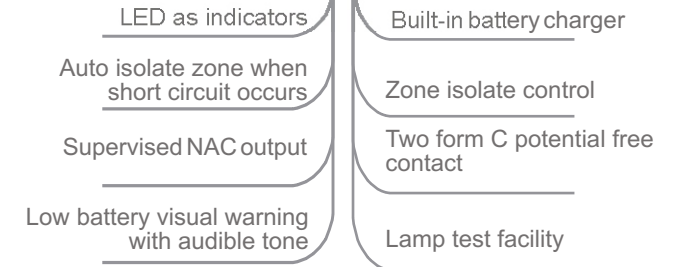

Specification

Electrical Specifications

Primary power supply	220V/110V $\pm 10\%$ AC, 50/60Hz
Secondary power supply	24VDC (2nos of 12V, 1.3/7Ah SLA battery)
Battery charging current	500 mA(max)
Battery Charging Voltage	28 \pm 1V
Operating temperature	0°C to 49°C
Storage temperature	5°C to 50°C
Humidity	0-95% RH (Non-condensing)
Housing	16 guage cold rolled sheet metal powder coated

Initiating Device Circuit(zone circuit)

Normal voltage	24V DC
Alarm current	25mA(max)/Zone
Short circuit peak current	48mA(max)
End of line Resistor	4.7K Ω , 1/2 watt
Detectors per zone	20

Relay Contact Rating

Fire relay	2A@24VDC
Fault relay	2A@24VDC
NAC output	480mA@24VDC

Mechanical Specifications

Dimensions(HXWXD)	342x275x70mm
--------------------------	--------------

Conventional Fire Alarm Panel- 8 Zone

Model No - ALCAP801Z

Overview:

This micro controller based conventional Fire Alarm control panel is easy to install and maintain by the user. It has simple LED indication and touch control switch. This unit is designed for small application and budget friendly. Since it has very less hardware, chances of failures are also very less. This panel can be used with all standard brand conventional devices.

Specification

Electrical Specifications


Primary power supply	220V/110V $\pm 10\%$ AC, 50/60Hz
Secondary power supply	24VDC (2nos of 12V, 1.3/7Ah SLA battery)
Battery charging current	500 mA(max)
Battery Charging Voltage	28 \pm 1V
Operating temperature	0°C to 49°C
Storage temperature	5°C to 50°C
Humidity	0-95% RH (Non-condensing)
Housing	16 guage cold rolled sheet metal powder coated

Initiating Device Circuit(zone circuit)

Normal voltage	24V DC
Alarm current	25mA(max)/Zone
Short circuit peak current	48mA(max)
End of line Resistor	4.7K Ω , 1/2 watt
Detectors per zone	20

Relay Contact Rating

Fire relay	2A@24VDC
Fault relay	2A@24VDC
NAC output	480mA@24VDC

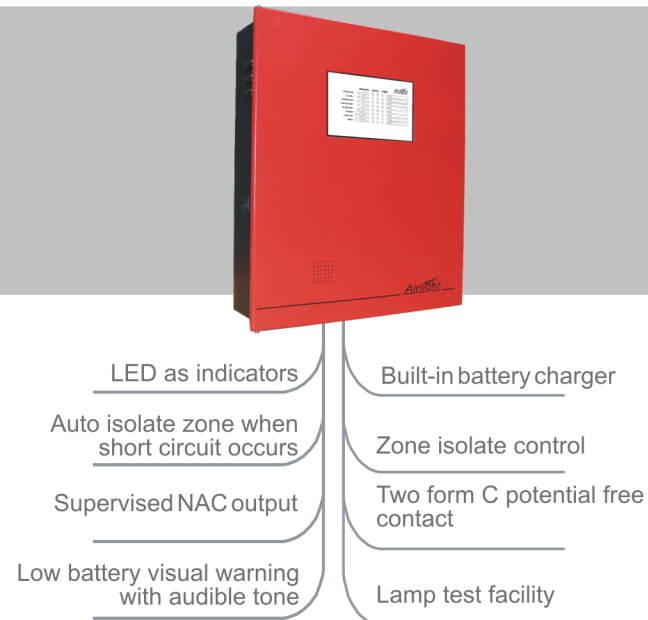

Mechanical Specifications


Dimensions(HXWXD)	460x400x125mm
--------------------------	---------------

Conventional Fire Alarm Panel- 12 Zone

Model No - ALCAP1201Z

Overview:

This micro controller based conventional Fire Alarm control panel is easy to install and maintain by the user. It has simple LED indication and touch control switch. This unit is designed for small application and budget friendly. Since it has very less hardware, chances of failures are also very less. This panel can be used with all standard brand conventional devices.

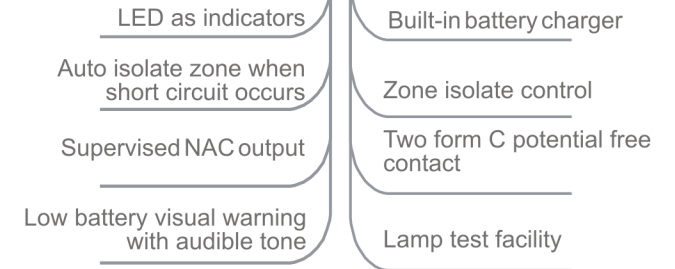

Specification

Electrical Specifications

Primary power supply	220V/110V $\pm 10\%$ AC, 50/60Hz
Secondary power supply	24VDC (2nos of 12V, 1.3/7Ah SLA battery)
Battery charging current	500 mA(max)
Battery Charging Voltage	28 \pm 1V
Operating temperature	0°C to 49°C
Storage temperature	5°C to 50°C
Humidity	0-95% RH (Non-condensing)
Housing	16 guage cold rolled sheet metal powder coated

Initiating Device Circuit(zone circuit)

Normal voltage	24V DC
Alarm current	25mA(max)/Zone
Short circuit peak current	48mA(max)
End of line Resistor	4.7K Ω , ½ watt
Detectors per zone	20

Relay Contact Rating

Fire relay	2A@24VDC
Fault relay	2A@24VDC
NAC output	480mA@24VDC

Mechanical Specifications

Dimensions(HXWXD)	460x400x125mm
--------------------------	---------------

Conventional Gas Leak Detector

Model No - AC103LPG



Built-in sounder

LED indicators for
mains and alarm

Easy to install and elegant design

Overview:

This Conventional Gas Leak Detector is designed to detect and alert the leak of flammable gases. These detectors employ a built-in sounder for warning the occupants. The alarming detector communicates to the control panel to alert the Zone of emergency. This aesthetically designed unit accentuates and upgrades safety standards of home by preventing accidents due to leakage of LPG.

Specification

Electrical Specifications


Power supply	24V DC
Power consumption	1 W
Sensitivity	Butane LEL:1.8vd%/HEL(UEL):8.4vd% Propane LEL:2.1vd%/HEL(UEL):8.4vd% Methane LEL:5.0vd%/HEL(UEL):15vd%
Detection distance	LPG-30cm above the ground on the wall Coal gas, Natural gas-30cm below ceiling
Indications	
Warmup mode	Flashing Green LED
Standby mode	Blinking Green LED(During Scan)
Alarm mode	Red LED(Glows Steady)
Output	Relay Contact NO/NC

General Specifications

Sound level	80 dB at 1m
Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Color	White
Housing	Polycarbonate


Mechanical Specifications

Dimensions(HxWxD)	130x75X40mm
Weight	220g

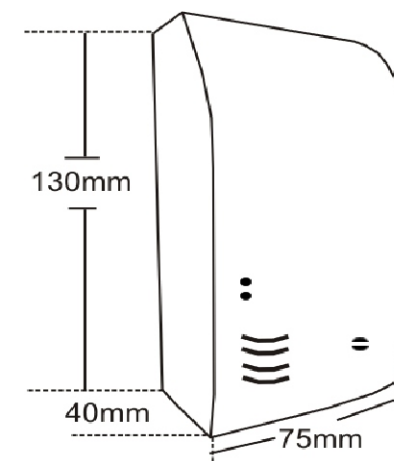

Conventional Flame Proof Gas Leak Detector

Model No - AC103FLPG

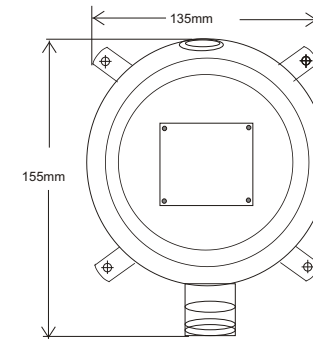

Overview:

This Conventional Flame Proof Gas Leak Detector is designed to detect and alert the leak of flammable gases. The alarming detector communicates to the control panel to alert the Zone of emergency. This device is mainly designed for gas bank at hotel, residential complex, hotel kitchen, industries etc.,

Specification

Electrical Specifications

Power supply	24 VDC
Power Consumption	1 W
Sensitivity	Butane LEL:1.8vd%/HEL(UEL):8.4vd% Propane LEL:2.1vd%/HEL(UEL):9.5vd% MethaneLEL:5.0vd%/HEL(UEL):15vd%
Detection distance	LPG-30cm above the ground on the wall coal gas, natural gas-30cm below ceiling

General Specifications

Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Wiring	2 Core
Type of protection	Flameproof-Fp
Area classification	Safe area
Apparatus standard	IS-13947/93
Colour	Red

Mechanical Specifications

Dimensions(HxWxD)	155x135x75mm
Weight	3kg(Approx.)
Material	Aluminium Lm6
IP Protection	IP 65
Finish	Anti corrosive epoxy Powder coated
Cable Entry	2 x 3/4" ET
Gasket	Neoprene
Hardware	Stainless Steel(SS-304)

Conventional- 2 Zone LPG Leak Alarm Panel

Model No -ALPG201ZT



Overview:

This micro controller based conventional LPG Leak Alarm panel is easy to install and maintain by the user. It has simple LED indication and touch control switch. This unit is designed for small application and budget friendly. Since it has very less hardware, chances of failures are also very less. This panel can be used with all standard brand conventional devices.

Specification

Electrical Specifications

Primary power supply	220V/110V ±10%AC, 50/60Hz
Secondary power supply	24VDC (2nos of 12V, 1.3/7Ah SLA battery)
Battery charging current	500 mA(max)
Battery Charging Voltage	28±1V

General Specifications

Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Housing	16 guage cold rolled sheet metal powder coated

Initiating Device Circuit(zone circuit)

Normal voltage	24V DC
Alarm current	25mA(max)/zone
Short circuit peak current	48mA(max)
Short circuit peak current	48mA(max)
End of line Resistor	4.7KΩ ½ watt
Detectors per zone	20

Relay Contact Rating

Fire relay	2A@24VDC
Fault relay	2A@24VDC
NAC output	480mA@24VDC

Mechanical Specifications

Dimensions(HxWxD)	342x275X70mm
-------------------	--------------

LED as indicators	Built-in battery charger
Auto isolate zone when short circuit occurs	Zone isolate control
Supervised NAC output	Two form C potential free contact
Low battery visual warning with audible tone	Lamp test facility

Conventional- 4 Zone
LPG Leak Alarm Panel

Model No -ALPG401ZT

Overview:

This micro controller based conventional LPG Leak Alarm panel is easy to install and maintain by the user. It has simple LED indication and touch control switch. This unit is designed for small application and budget friendly. Since it has very less hardware, chances of failures are also very less. This panel can be used with all standard brand conventional devices.

Specification

Electrical Specifications

Primary power supply	220V/110V ±10%AC, 50/60Hz
Secondary power supply	24VDC (2nos of 12V, 1.3/7Ah SLA battery)
Battery charging current	500 mA(max)
Battery Charging Voltage	28±1V

General Specifications

Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Housing	16 guage cold rolled sheet metal powder coated

Initiating Device Circuit(zone circuit)

Normal voltage	24V DC
Alarm current	25mA(max)/zone
Short circuit peak current	48mA(max)
Short circuit peak current	48mA(max)
End of line Resistor	4.7KΩ ½ watt
Detectors per zone	20

Relay Contact Rating

Fire relay	2A@24VDC
Fault relay	2A@24VDC
NAC output	480mA@24VDC

Mechanical Specifications

Dimensions(HxWxD)	342x275X70mm
-------------------	--------------



- LED as indicators

Auto isolate zone when short circuit occurs

Supervised NAC output

Low battery visual warning with audible tone
- Built-in battery charger

Zone isolate control

Two form C potential free contact

Lamp test facility

Conventional Response Indicator

Model No - AC103RI



Aesthetically Pleasing design

Quick and simple to install

Wide viewing angle

Overview:

This device is designed to be used as an indicator for detectors that are located at closed/inaccessible spaces. It contains a LED which lights up when the detector detects fire.

Specification

Electrical Specifications

Operating voltage Nominal 12/24V DC
Minimum 9V DC
Maximum 26V DC

Alarm current 4mA

Indications

Alarm Red LED(Glows Steady)

General Specifications

Operating temperature 0°C to 49°C

Storage temperature 5°C to 40°C

Humidity 0-95% RH (Non-condensing)


Color White

Housing Polycarbonate

Mechanical Specifications


Dimensions(DiaxH) 70x18mm

Weight 24g

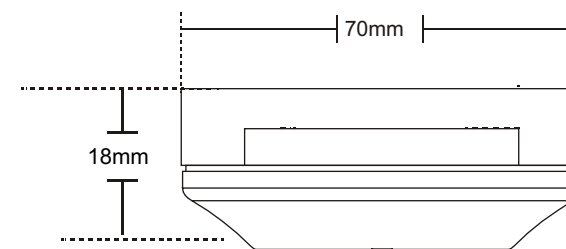

Conventional Analogue LHS Cable Interface Unit

Model No - AC101LHSI

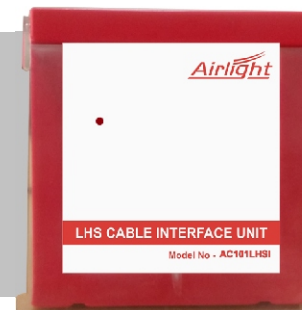

Overview:

This Conventional analogue LHS(Linear Heat Sensing) cable Interface unit is designed to be used for Fire detection with analogue type LHS cable. This unit is compatible to use with all standard conventional panel.

- Low standby current
- Wide operating voltage
- Blinking LED for Visual Supervision
- Transient Protection upto 2.4KV
- Fault monitoring of LHSC for open and short circuit conditions
- Easy to install
- Powered by IDC

Specification

Electrical Specifications

Operating voltage	17-24V DC
Quiescent current	600 μ A
Alarm current	25 mA(max)
Maximum IDC Resistance	100 Ohms
Maximum IDC Current	600 μ A

General Specifications


Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Color	Red
Housing	Top-plastic, Bottom-Mild Steel

Mechanical Specifications

Dimensions(HXWXD)	120x120x48mm
Weight	
Without Backbox	108g
With Backbox	378g


Indications

Normal	Green LED (Blinks during scan)
Alarm	Red LED (Glows steady)

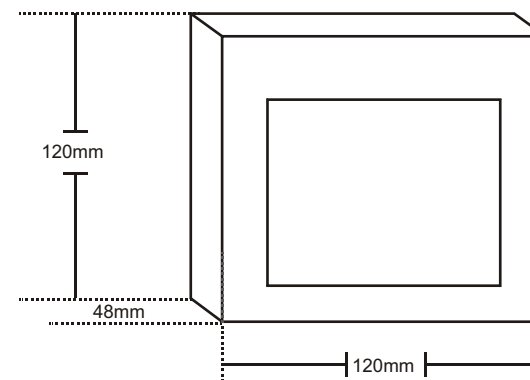

Conventional Digital LHS Cable Interface Unit

Model No - AC101DLHSI

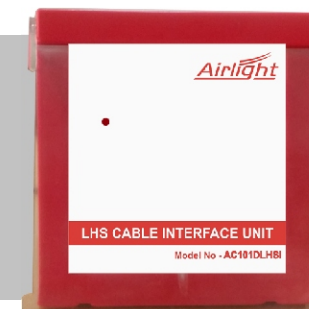

Overview:

This Conventional digital LHS(Linear Heat Sensing) cable Interface unit is designed to be used for Fire detection with digital type LHS cable. This unit is compatible to use with all standard conventional panel.

- Low standby current
- Blinking LED for Visual Supervision
- Fault monitoring of LHSC for open circuit conditions
- Easy to install
- Powered by IDC
- Wide operating voltage
- Transient Protection upto 2.4KV
- Non Resettable operation

Specification

Electrical Specifications

Operating voltage	17-24V DC
Quiescent current	600 μ A
Alarm current	25 mA(max)
Indications	
Normal	Green LED (Blinks during scan)
Alarm	Red LED (Glows steady)

General Specifications

Operating temperature	0°C to 49°C
Storage temperature	5°C to 40°C
Humidity	0-95% RH (Non-condensing)
Color	Red
Housing	Top-plastic, Bottom-Mild Steel

Mechanical Specifications

Dimensions(HXWXD) 120x120x48mm

Weight

Without Backbox	108g
With Backbox	378g

