


Wireless Addressable Manual Call Point

Model – **AW104CP**

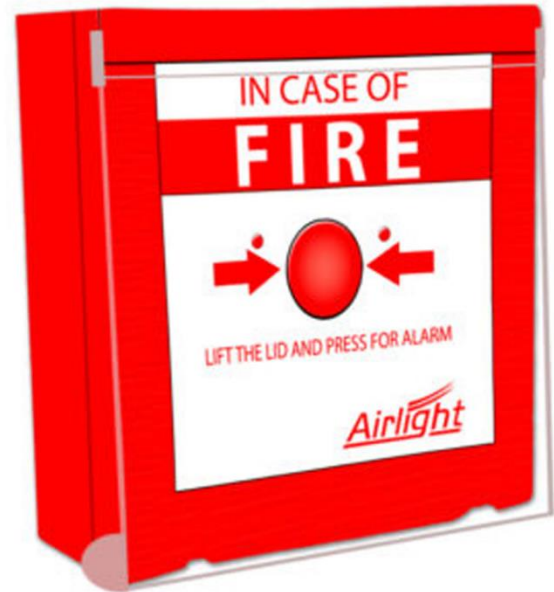

Features:

- ✓ Soft addressing
- ✓ Blinking LED for visual supervision
- ✓ Flip cover to avoid accidental activation
- ✓ No manual reset is required at MCP
- ✓ Easy to install and elegant design

Overview:

This wireless addressable Manual Call Point is designed for instant manual actuation of fire notification system. This unit designed for indoors, employ a flip cover to minimize false intervention. Wireless detectors are battery powered and use radio modules for communication to the panel.

Specifications

Electrical specifications

Operating voltage	3V
Quiescent current	2µA
Alarm current	400µA
Battery type	2x1.5V AA Size Battery
Carrier frequency	433.92 MHz

Mechanical specifications

Dimensions(HxWxD)		Weight	
HxWxD	120x120x48mm	Without Back box	108g
		With Back box	378g

General specifications

Operating temperature	-10°C to 55°C
Storage temperature	-10°C to 60°C
Humidity	0-95% RH(Non-condensing)
Colour	Red
Housing	ABS
Compatibility	ALAW2XV1 Protocol

Indications

Normal	Green LED (blinks 60+/- 10 sec)
Alarm	Red LED (glows steady)