

Conventional Manual Call Point

Model – **AC104CP**

Features:

- ✓ Low standby current
- ✓ Wide operating voltage
- ✓ Flip cover to avoid accidental activation
- ✓ Easy to install and elegant design
- ✓ No manual reset is required at MCP


Specifications

General specifications

Operating temperature	-10°C to 55°C
Storage temperature	10°C to 60°C
Humidity	0-95% RH(Non-condensing)
Colour	Red
Housing	ABS

Mechanical specifications

Dimensions(HxWxD)		Weight	
HxWxD	120x120x48mm	Without Back box	108g
		With Back box	378g

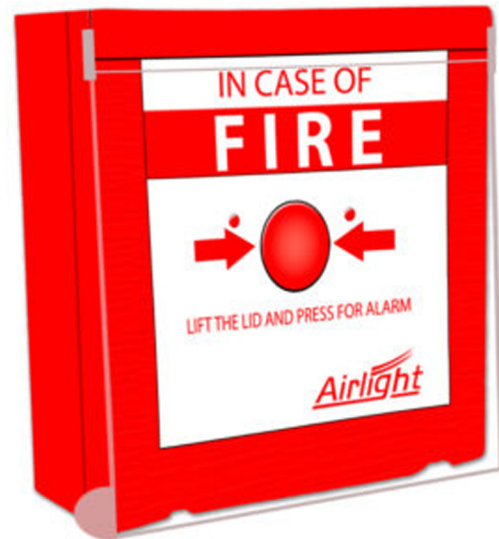

Overview:

This conventional manual call point is designed for instant manual activation of fire notification system. This unit is designed for indoors, employ a flip cover to minimise false intervention. No need of the manual reset, it goes with the elite interior.

Electrical specifications

Operating voltage	Nominal 12/24V DC Minimum 9V DC Maximum 26V DC
Quiescent current	1µA
Alarm current	25 mA at 24V 12 mA at 12V

Indications

Normal Indicator	Green LED(Blinks during scan)
Alarm indicator	Red LED(Glows Steady)